

Espressif ESP32-P4-Function-EV-Board PINOUT

Pinout reference · ESP32-P4

GPIO

safe

use with care

serial, USB

PMU capable

ADC

touch

RTC

32 kHz crystal

SPI

strapping

on-board feature

default function


not connected

power

ground

EN / reset

outer header row

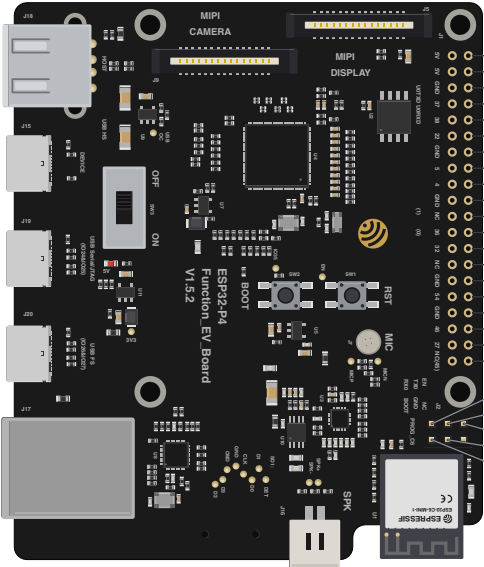

inner header row

