

LOLIN S2 Mini PINOUT

Pinout reference · ESP32-S2

ADC

touch / DAC

RTC

32 kHz crystal

SPI

JTAG

on-board feature

power

ground

EN / reset


GPI0

safe

use with care

serial, USB

PWM capable

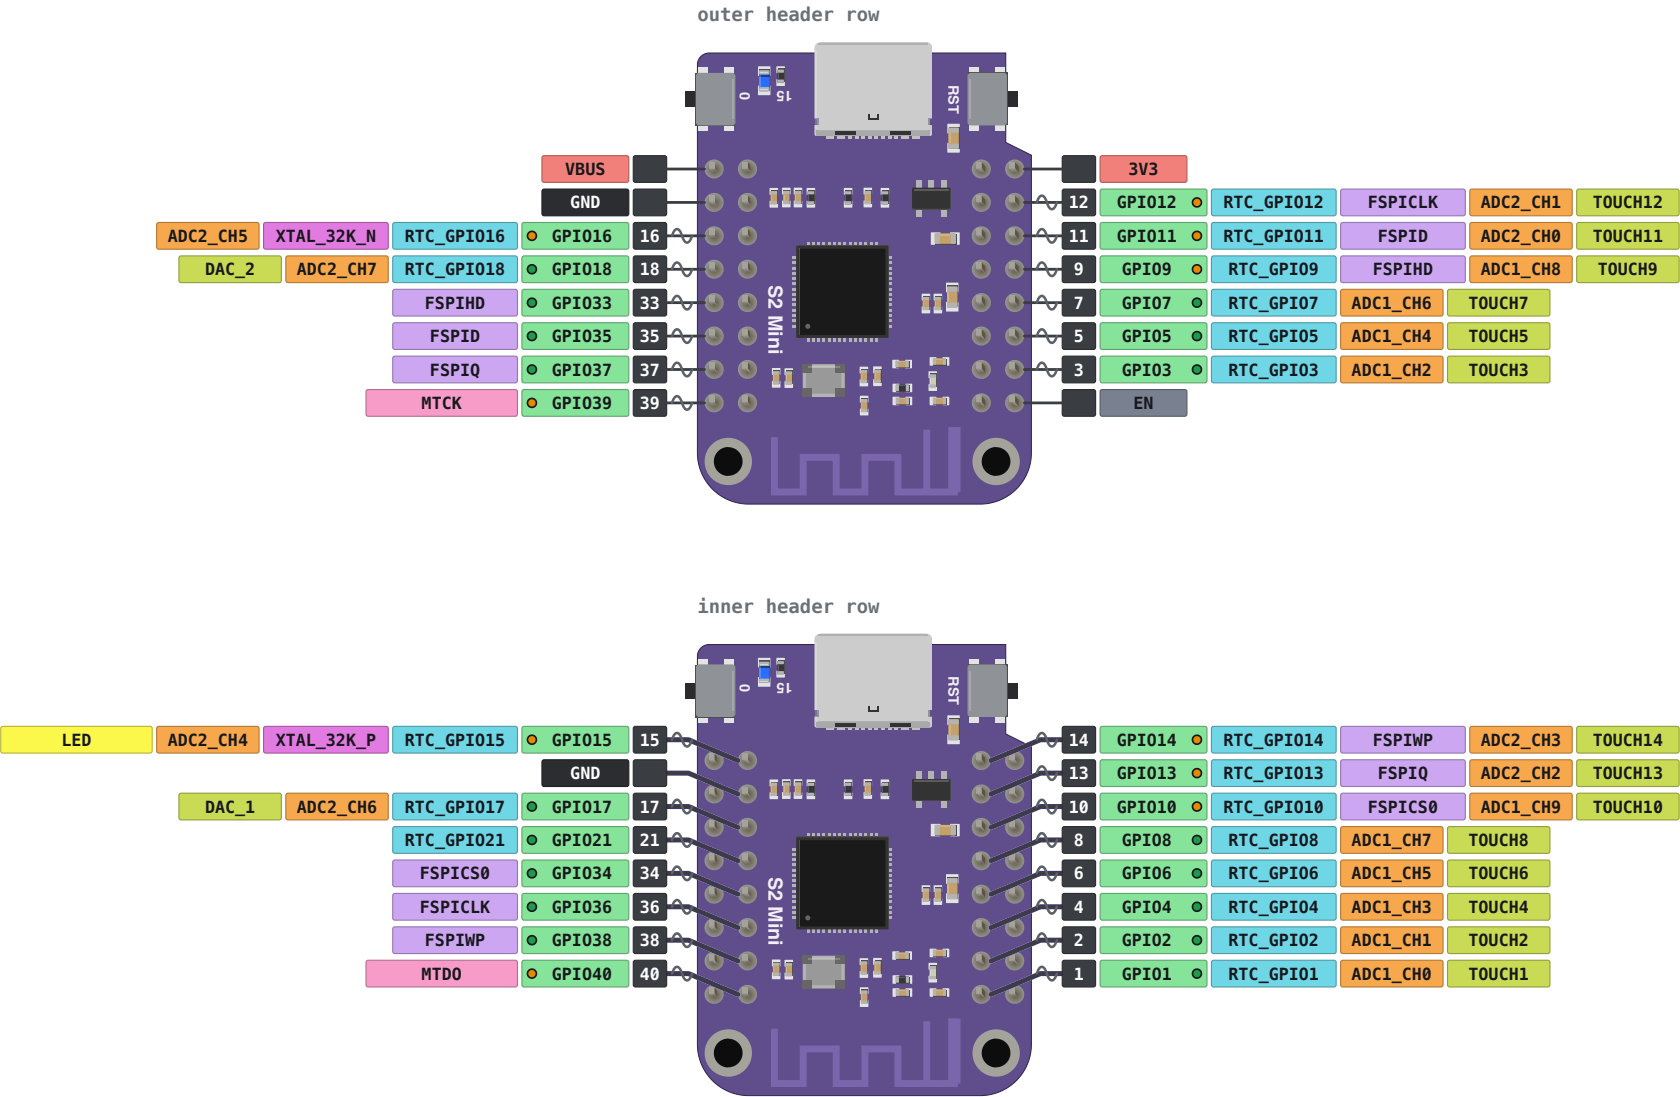

Pin functions from the ESP32-S2 Series Datasheet v1.9. Strapping pins per Espressif.

© 2026 espboards.dev · CC BY-NC 4.0



