


Olimex ESP32-POE2 PINOUT

Pinout reference · ESP32

GPIO ● safe ● use with care ● serial, USB ● PMU capable
 ADC Touch / DAC RTC 32 kHz crystal SPI JTAG UART strapping on-board feature power ground EN / reset

outer header row

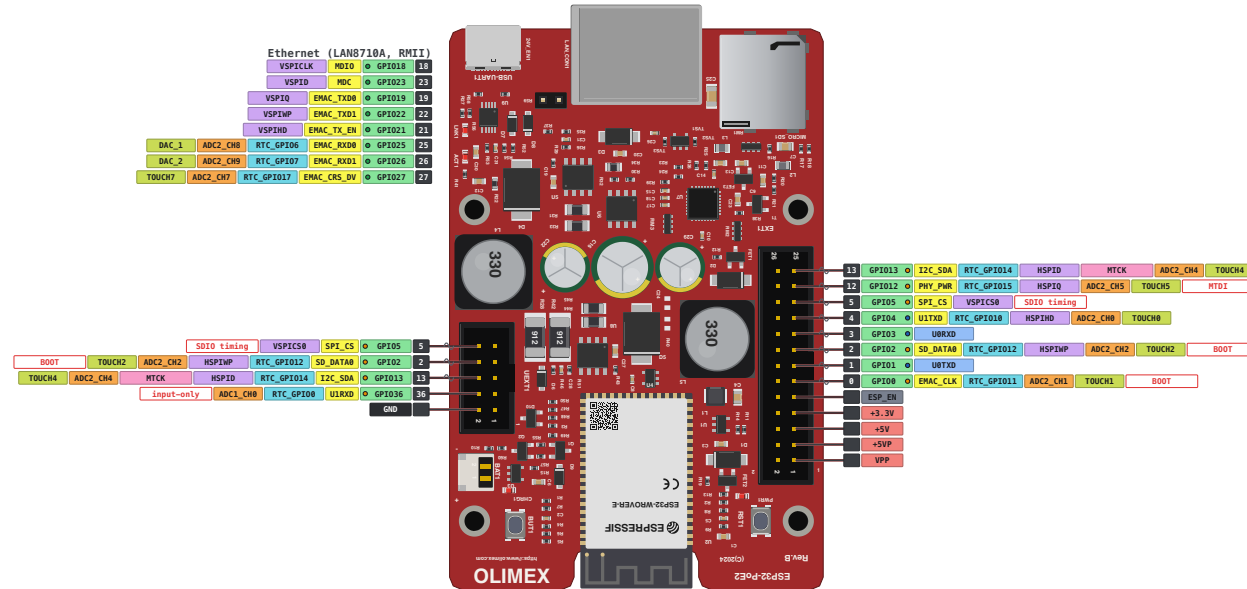

inner header row

